

Arne

Accessory for
catenary-mounting

Urbidermis Team
2013



Product description

Characteristics

Accessory for installing a floodlight on a catenary.
Allows for 360° horizontal rotation for positioning the Arne floodlight.

Finishes



Light grey



Medium grey



Dark grey

The finishes shown are purely indicative. With **Superior** protection: high corrosion resistance for environments with demanding climate conditions. For coastal areas with severe climate conditions, check out our Premium protection finish. Other colours are available upon request.

Materials

- AISI304 stainless steel support and anodised injected aluminium EN-AC-46100 fastening parts with powder-coated finish.
- A2 stainless steel hardware.


Installation

- Attach the accessory to the floodlight, and then attach the assembly to the catenary.
- Steel cable which can be used: \varnothing 6-8 mm.
- The accessory is delivered separately: no floodlight included.
- Instructions and hardware included.
- Cable for catenary not included.

Weight kg [lb]

Accessory: 0.8 [1.8]
Approximate weight without packaging.

Dimensions cm [in]

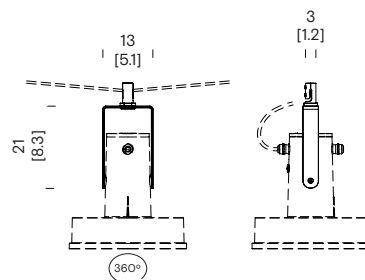

ARA03

Parc de Belloch, Ctra. C251, km. 5,6, 08430 La Roca (Barcelona)
Warehouse, Pol. Ind. Sud, Avenida del Vallés n°19, 08440 Cardedeu (Barcelona)

Last updated: 11/06/2025. For further information, go to urbidermis.com / Tel. +34 938 619 100 / hola@urbidermis.com
Technical information provided by Urbidermis may be modified without prior notice. We protect intellectual property.



urbidermis