

Latina

Streetlight

Beth Galí
1998



Product description

Certificates




Finishes

Luminaire



Light grey

Column



Corten steel

Support



Galvanised steel

The finishes shown are purely indicative. With **Superior** protection: high corrosion resistance for environments with demanding climate conditions. For coastal areas with severe climate conditions, check out our **Premium** protection finish. Other colours are available upon request. Corten steel initially displays a tone that gradually evolves as it completes its natural oxidation when exposed to the outdoors.

Materials


- Anodised injection-moulded aluminium EN-AC-47100 Arne floodlights with powder-coated finish.
- Interior ABS-PC plastic reflector.
- Tempered optical glass diffuser.
- A2 stainless steel hardware and metal cable gland.
- Corten steel shaft with rectangular base and forked upper section.
- Rectangular tube section support for five floodlights made from hot-dip galvanised steel.
- Round tube brace made of hot-dip galvanised steel.
- Stainless steel joints.

Regulations

- UNE-EN 60529
- UNE-EN 60598
- UNE-EN 55015
- UNE-EN 61000
- UNE-EN 50102
- UNE-EN 62031
- Lighting system with CE marking from a laboratory certified by ENAC [Spanish National Accreditation Body].
- IP66 (hermetically protected from penetration of dust and water jets).
- Suitable for wet areas.
- IK08 (protected from external mechanical impacts).
- Electrical class: Class I (CE).

Installation and maintenance

- Column secured via a concrete block, with a groove for electrical connection, which is produced on site with six anchoring bolts per column, 24 cm below the level of the pavement.
- Template and anchoring bolts included.
- The element is delivered as two separate parts: the luminaire and the column.
- Instructions and hardware included.
- The element is supplied disassembled in four separate components: floodlights, support, brace and column.
- Clean using pH neutral, alcohol-free, non-abrasive cleaning products. The optical glass can be cleaned with non-abrasive cleaning products.



Reference	Total height (m)	Visible height (m)	External measurements (mm) (e)	Thickness (mm)	Base plate (mm)	Distance between bolts (mm) (f/d)	Bolts (x6)	No. of openings	Opening (mm) (a/b/c)	Foundation (mm) (x/y/z)
LTFL15	14.9	14.7	300	5	600x600x20	480/240	M27x1000	1	160x660x340	1800x1800x2000

*Recommendations: for calculation in ground type II (according to UNE-40) and wind speed of 29 m/s, with soil formed by loose or wet sand of medium compactness (EO = 4800 KN/m²), with HM-20 concrete foundations. Information is not binding. We advise that checks are carried out at each location.

Technical information

System power (W)

High efficiency optical unit
36 LEDs 5x56 W

Operating current (mA)

500

Colour temperature (K)

3000 CRI min 80

Power supply

Constant current driver.

Protocols and control

Protocols

- 1-10V protocol
- Dali protocol

Control

- Dynamic programming
- Analogue control

Functionalities

- Constant Luminous Management (CLM)
- Temperature control
- Surge protector (CE)

Recommended cable

0.6-1 kV
3 x 2.5 mm²

Operating voltage

220-240V 50-60Hz (CE)

Nominal operating temperature (°C)

Ta 35

Service life

TM21 L90 (10k) > 100,000 h
Luminous flux is maintained at 90% after 100,000 h.

Upper Hemisphere Flux (UHF%)

0

Surface exposed to wind (m²)

SW 0.24


Weight kg [lb]

895 [1973.1]


Power factor (cos Φ)

Current (mA)	P (W) 100% CLO 90%
	36 LEDs
500	0.97

Dimensions cm [in]

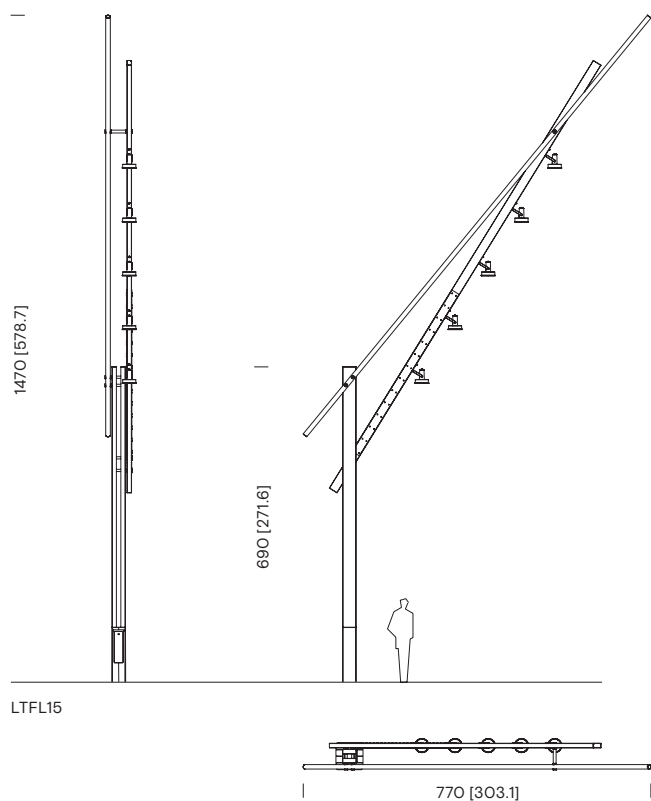

Lighting distributions

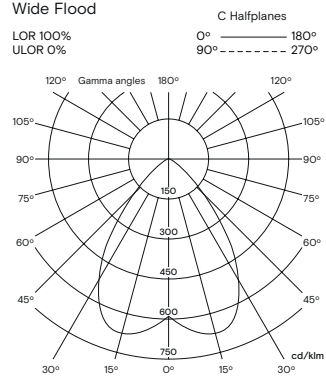Architectural
Wide Flood

Latina					Wide Flood **WF	
Reference	System power (W)	No. of LEDs	Colour temperature (K)	Current (mA)	Luminous flux (lm)	Luminous efficacy (lm/W)
AR*P36B1**	56	36	3000K CRI min80	500	6181	110