

# Tàctil

Poller

Antonio de Marco  
2007



## Product description

### Certificates



### Finishes



Corten steel

The finishes shown are purely indicative. Suitable for coastal areas. The corten steel changes colour as it naturally rusts when exposed to air.

### Materials

- Element entirely made from oxycut shot-blasted corten steel.

### Installation and maintenance

- The element is recessed with two bolts as part of the same part, inserted in holes made in the pavement beforehand, and filled in with epoxy resin, quick-setting cement or similar.
- The element is supplied assembled and packaged.
- Installation and assembly instructions included.
- It does not require any maintenance.

### Regulations


- EN 10 029
- EN 10 163-2
- UNE 41510

### Weight kg [lb]

- Poller: 20 [44.1]

Approximate weight without packaging.

### Dimensions cm [in]

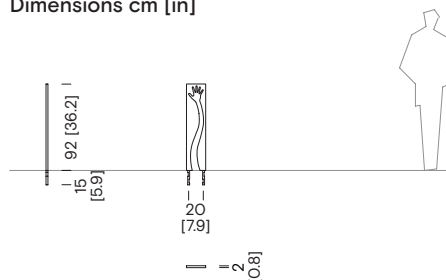

Poller  
TAP11

Parc de Belloch, Ctra. C251, km. 5,6, 08430 La Roca (Barcelona)  
Warehouse, Pol. Ind. Sud, Avenida del Vallés nº19, 08440 Cardedeu (Barcelona)

Last updated: 23/04/2025. For further information, go to [urbidermis.com](http://urbidermis.com) / Tel. +34 938 619 100 / [hola@urbidermis.com](mailto:hola@urbidermis.com)  
Technical information provided by Urbidermis may be modified without prior notice. We protect intellectual property.



**urbidermis**