Táctil

Poller

Antonio de Marco
2007

Product description

Certificates

CE

Finishes

Corten steel

The finishes shown are purely indicative. Suitable for coastal areas. The corten steel changes colour as it naturally rusts when exposed to air.

Materials

- Element entirely made from oxycut shot-blasted corten steel.

Installation and maintenance

- The element is recessed with two bolts as part of the same part, inserted in holes made in the pavement beforehand, and filled in with epoxy resin, quick-setting cement or similar.
- The element is supplied assembled and packaged.
- Installation and assembly instructions included.
- It does not require any maintenance.

Regulations

- EN 10 029
- EN 10 163-2
- UNE 41510

Weight kg [lb]

- Poller: 20 [44.1]

Approximate weight without packaging.

Dimensions cm [in]

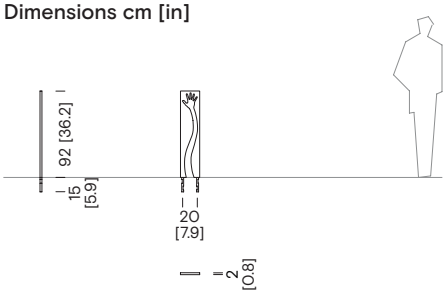

Poller
TAP11

Parc de Belloch, Ctra. C251, km. 5,6, 08430 La Roca (Barcelona)
Warehouse, Pol. Ind. Sud, Avenida del Vallés nº19, 08440 Cardedeu (Barcelona)