

# Tumbler

## Exterior wall lamp

Industrial Facility  
2017



## Product description

### Certificates



### Finishes



White

The finishes shown are purely indicative. With **Superior** protection: high corrosion resistance for environments with demanding climate conditions. For coastal areas with severe climate conditions, check out our Premium protection finish. Other colours are available upon request.

### Materials

- Floodlight made of 6063-T5 extruded aluminium and EN-AC-47100 die cast aluminium, anodised, with a powder-coated finish.
- Interior ABS-PC plastic reflector.
- Tempered optical glass diffuser.
- EN-AC-46100 die cast aluminium rosette with powder-coated finish.
- A2 stainless steel hardware and metal cable gland.

### Installation and maintenance

- The lamp is delivered in a package.
- Instructions and hardware included.
- The system is compatible with an electrical installation which is integrated into the façade.
- Fixing studs not included.
- It is recommended to secure it on a uniform, continuous surface.
- Includes pressure compensation valve.
- Clean using pH neutral, alcohol-free, non-abrasive cleaning products.

### Regulations

- UNE-EN 60529
- UNE-EN 60598
- UNE-EN 55015
- UNE-EN 61000
- UNE-EN 50102
- UNE-EN 62031
- Lighting system with CE marking from a laboratory certified by ENAC [Spanish National Accreditation Body].
- IP66 (hermetically protected from penetration of dust and water jets).
- IK08 (protected from external mechanical impacts).
- Electrical class: Class I (CE).

# Technical information

## System power (W)

High efficiency optical unit  
- COB 16W

## Operating current (mA)

- 350

## Colour temperature (K)

- 2700 CRI min 80

Other colour temperatures and/or CRIs are available upon request.

## Protocols and control

### Control

- TRIAC/Phase-cut  
- On/Off

## Operating voltage


- 230V 50Hz (CE)

## Weight kg [lb]

- Wall-mounted light: 9.5 [20.9]



Approximate weight without packaging.

## Lighting distribution

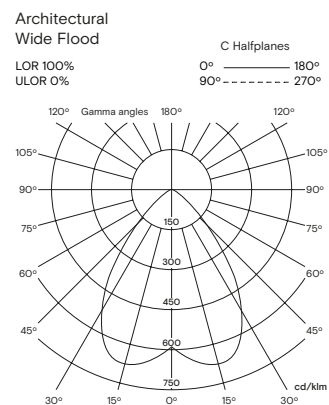


## Dimensions cm [in]

340 [133.9]

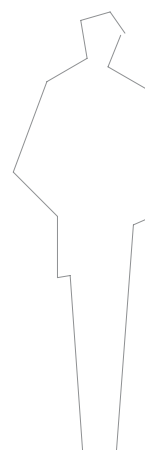

41 [16.1]



Applique  
TMALR