



Description

Lighting that is mounted on a wall, ceiling or floor provides illumination while maintaining coherence throughout the entire project layout. The floodlight can be directed to illuminate sculptures, architectural facades, plant elements, green areas, paths, squares, parking areas, landscapes or transit areas.

Materials

Die cast EN-AC-47100 aluminum support and base made from AISI304 stainless steel, thermal coating finish with C3 anti-corrosive protection. A2 stainless steel screws.

Installation


Attach the accessory to the surface and then the floodlight.

The system is compatible with a recessed or surface electrical installation. Installation and assembly instructions, and screws included. Fixing wall plugs not included.


Finishes



Light grey



Medium grey




Dark grey

*The colors shown are merely indicative. (Other colors upon request)

**Inquire about finishes for maritime environments

Approximate weight without packaging (kg)

Wall accessory: 1.3 - Long wall accessory: 2.0

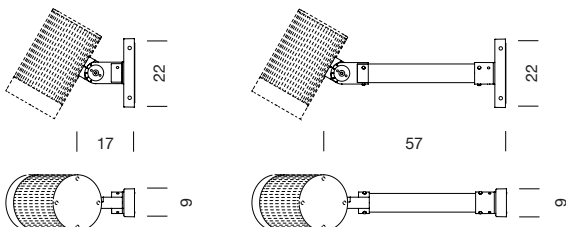

Offices Parc de Belloch
 Ctra. C-251, Km 5.6
 E-08430 La Roca (Barcelona, Spain)
 +34 938 619 100



Warehouse
 Carrer del Fou, Polígon Industrial Sud
 E-08440 Cardedeu (Barcelona, Spain)
 +34 938 619 182