



Materials

The support is made from one AISI 304 (optionally AISI 316) satin polished stainless steel plate and a Ø 84 x 2 mm or Ø 73 x 1.5 mm mirror polished stainless steel guard rail.

Installation and maintenance

The structure is embedded 10 cm into the road surface and fixed with a 125 x 125 x 8 mm plate and expansion anchors. Delivered unassembled and packaged in two parts: support and tube. Instructions, screws and anchor bolts are included. No functional maintenance is required.


For further information log onto urbidermis.com

Standards

EN 10088, UNE EN-1090, ISO 1127, UNE 41510, UNE-EN 12329.

Finishes

Support



Satin polished

Handrail



Mirror polished

*The colours shown are merely indicative and may differ from reality. (Other colours available to order)

**Consult finishes for marine environments.


Weight kg (unpacked)

Initial modulus: 33,3

Alignment module: 99.6

Initial module with mid-level guardrail: 37,6

Alignment module with mid-level guardrail: 112.9

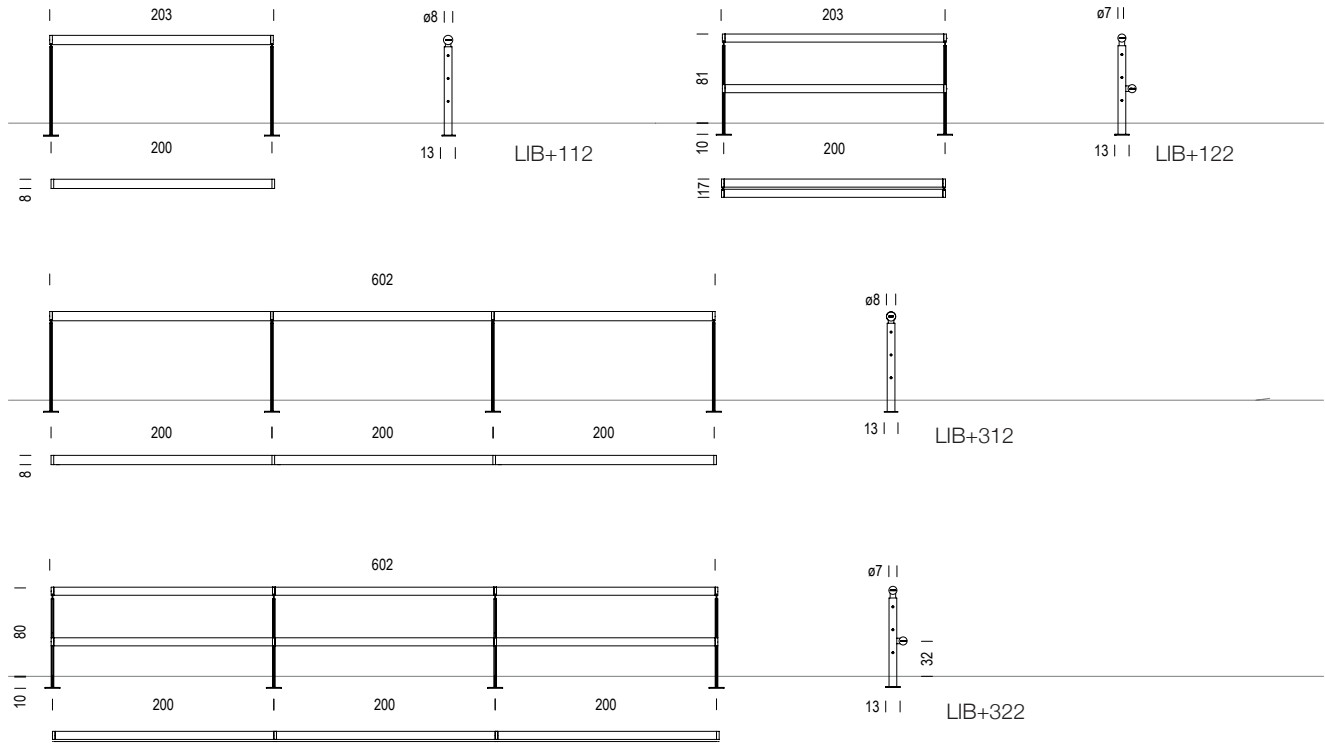

Dimensions in cm

Headquarters Parc de Belloch
Ctra. C-251, Km 5,6
E-08430 La Roca (Barcelona, Spain)
+34 938 619 100

Warehouse
Carrer del Fou. Polígono Industrial Sud
E-08440 Cardedeu (Barcelona, Spain)
+34 938 619 182

